


SpitLight Compact

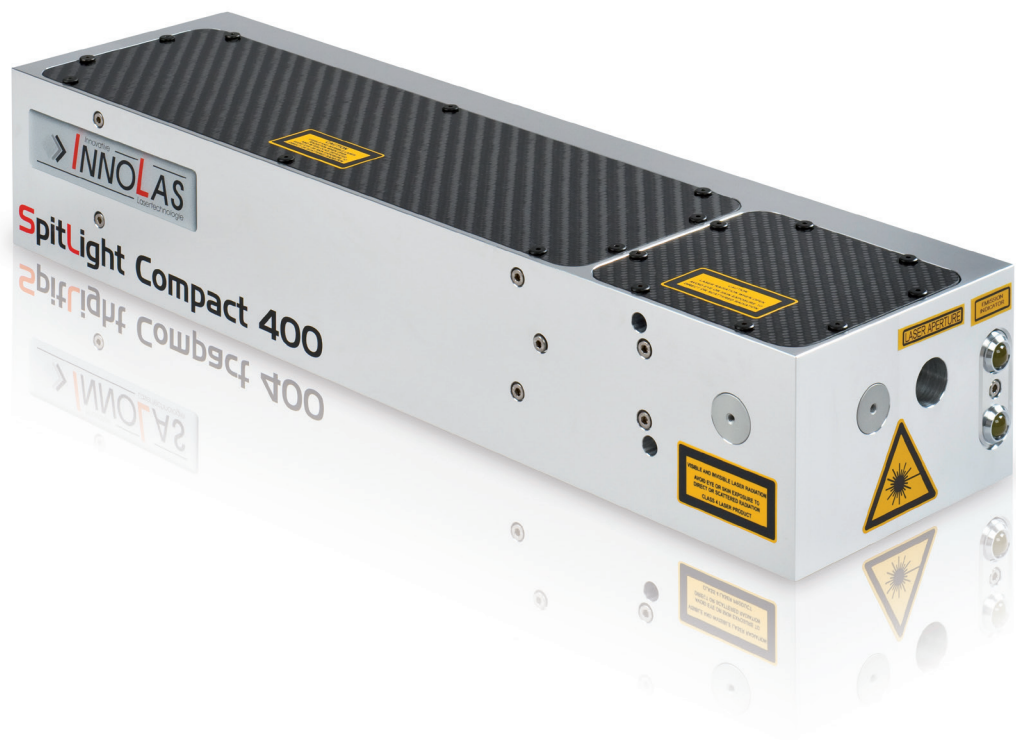


Features

- * Compact laser head and power supply with small footprint
- * Robust and stable resonator structure
- * Quick and easy change of flashlamps
- * Maintenance-free pumping chamber with ceramic reflector
- * Excellent beam quality and pointing stability
- * Long flashlamp lifetime

SpitLight Compact

Model		SpitLight Compact 100	SpitLight Compact 200	SpitLight Compact 400
Laser Parameters	Repetition Rate	Product available from 1 to 20 Hz (Following specifications are for 10 Hz)		
Energy	Pulse Energy at 1,064 nm	> 100 mJ	> 220 mJ	> 400 mJ
	Pulse Energy at 532 nm	> 60 mJ	> 140 mJ	> 240 mJ
	Pulse Energy at 355 nm	> 25 mJ	> 70 mJ	> 120 mJ
	Pulse Energy at 266 nm	> 15 mJ	> 40 mJ	> 50 mJ
	Pulse Energy at 213 nm	> 1 mJ	> 4 mJ	> 9 mJ
	Energy Stability at 1,064 nm (RMS)	< 0.7%	< 0.7%	< 0.7%
	Energy Stability at 532 nm (RMS)	< 1.3%	< 1.3%	< 1.3%
	Energy Stability at 355 nm (RMS)	< 2.0%	< 2.0%	< 2.0%
Beam Parameters	Pulse Width at 1,064 nm	6-8 ns	5-7 ns	5-7 ns
	Divergence	< 0.5 mrad	< 0.5 mrad	< 0.5 mrad
	Pointing Stability	< ± 50 µrad	< ± 50 µrad	< ± 50 µrad
	Beam Diameter	4 mm	5 mm	6 mm
	Temporal Jitter	< ± 1 ns	< ± 1 ns	< ± 1 ns
Operating Parameters	Lamp Lifetime	> 20,000,000 shots	> 20,000,000 shots	> 20,000,000 shots
	Electrical Supply	208-240 VAC, 50/60 Hz, 1.5 kW	208-240 VAC, 50/60 Hz, 1.5 kW	208-240 VAC, 50/60 Hz, 1.5 kW
	Cooling Water	Water-to-Air 10 Hz (Water-to-Water for higher frequencies)		
Weights	Laser Head	10 kg	10 kg	10 kg
	Power Supply	25 kg	25 kg	25 kg
Dimensions	Laser Head (in infrared) (L x W x H)	370 x 115 x 91 mm	370 x 115 x 91 mm	390 x 135 x 91 mm
	Power Supply (L x W x H)	480 x 220 x 480 mm	480 x 220 x 480 mm	480 x 220 x 480 mm

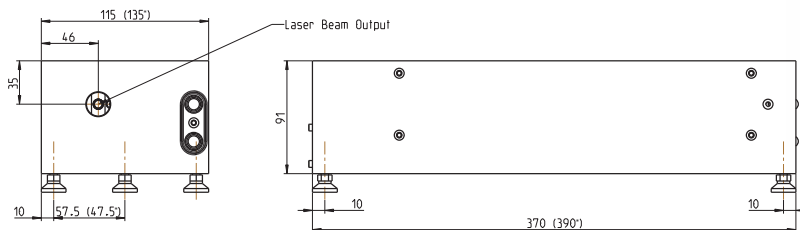

* Dimensions of SpitLight Compact 400

InnoLas follows a policy of continuous product improvement. All specifications are subject to change without notice. All specifications at 1,064 nm unless otherwise noted.

InnoLas Laser GmbH is DIN EN ISO 9001 certified.



InnoLas Laser GmbH | Justus-von-Liebig-Ring 8 | 82152 Krailling | Germany
Phone: +49 (89) 899 360 - 1400 | Fax: +49 (89) 899 360 - 1499
E-mail: info@innolas-laser.com | Homepage: www.innolas-laser.com

